

## Wrap-around Horizontal

A defined printable label-area with a following clear adhesive that laminates and protects the label from oil, dirt, water etc.

The permanent pressure-sensitive acrylic adhesive bonds well to a variety of surfaces backed with a 50 lb. bleached kraft release liner.

PRODUCT DATA	VALUE	TEST METHOD
<b>Physical Properties</b>		
Thickness (Mils[microns])	Film 3.5 (89) +/- 10% Adhesive 0.8-0.9 (20-23) +/- 0.1 (3) Liner 3.1 (79) +/- 10%	ASTM D 3652
Dimensional Stability (%)	MD 0.5 TD 0.5	Applied Shrinkage: 24 hour dwell time on aluminium panel then 24 hours at 160°F (71°C)
<b>Adhesion Properties</b>		
Ultimate Peel from	Average	ASTM D 903 (Modified for 72 hour dwell time)
	Oz/In (N/m)	
Acrylic	78 (858)	
Ceramic Tile	22 (242)	
Glass	50 (550)	
Painted Metal	59 (649)	
Stainless Steel	49 (539)	
<b>Expected Shear</b>		
Room Temp (hours)	325	ASTM D 3654 Method A
<b>Tack (gm/sq cm)</b>	250	a. 1 hr. dwell
<b>Expected Exterior Life</b>	Two years	b. 1 sq. in. Surface
<b>Service Temp. Range</b>	-40°F to 176°F (-40°C to 80°C)	c. 4 lb. Load
<b>Minimum App. Temp.</b>	50°F (10°C)	ASTM D 2979

## Colors

Available in yellow and white standard. Other colors on request.

YL=Yellow  
WE=White  
OE=Orange  
BL=Blue  
RD=Red  
GN=Green  
PE=Purple

## Material

3.5 mil. frosty clear vinyl film.

### Adhesive

High quality clear solvent based permanent acrylic adhesive.

## UL Specifications

UL recognized under UL 969 - UL File No. PGGU2.MH10170 Marking and Labeling System Materials – Component

## Typical uses

Wires – cables - hoses

## Storage stability


Six months when stored at 70°F (21°C) and 50% relative humidity.

## Notes

This information and data is believed to be accurate and reliable. Although the information and recommendations set forth herein are presented in good faith and believed to be correct as of this date, Link Solutions makes no representations as to the completeness or accuracy thereof. We place at your disposal the technical information necessary for the correct use of our products. As conditions and methods of use are beyond our control, that the person receiving the same will make their own determination as to the suitability for their purpose.

We reserve the right to modify characteristics with the aim of improving the product and adapting it to the requirements of the market


Item No	Product Code	Applicative Wire Diameter	Lines Across	Width A	Height B	Print Height C	D	E	Width of Liner F	PCS/Roll
		mm	pcs	mm	mm	mm	mm	mm	mm	pcs
WH12019	LSW-127-095-190-WE	2~3	4	12,70	19,05	9,53	15,24	24,05	63,50	5000
WH12025	LSW-127-095-254-WE	3~5	4	12,70	25,40	9,53	15,24	30,40	63,50	5000
WH12031	LSW-127-127-317-WE	3~6	4	12,70	31,75	12,70	15,24	36,75	63,50	5000
WH12036	LSW-127-127-365-WE	4~7	5	12,70	36,50	12,70	16,81	41,50	85,09	10000
WH19023	LSW-190-095-238-WE	2~4	4	19,05	23,81	9,52	20,32	28,81	85,09	10000
WH19044	LSW-190-127-444-WE	5~10	4	19,05	44,45	12,70	20,32	49,45	85,09	10000
WH20036	LSW-203-127-365-WE	4~7	4	20,32	36,50	12,70	20,32	41,50	85,09	10000
WH20038	LSW-203-127-381-WE	4~8	4	20,30	38,10	12,70	22,90	43,10	94,90	10000
WH25075	LSW-250-250-750-WE	8~15	2	25,00	75,00	25,00	28,00	80,00	59,00	3000
WH25019	LSW-254-095-190-WE	2~3	2	25,40	19,05	9,53	27,94	24,05	58,42	5000
WH25025	LSW-254-095-254-WE	3~5	2	25,40	25,40	9,53	27,94	30,40	58,42	5000
WH25036	LSW-254-127-365-WE	4~7	3	25,40	36,50	12,70	27,40	41,50	86,00	5000
WH25057	LSW-254-190-571-WE	6~12	2	25,40	57,15	19,05	27,40	62,15	59,00	3000
WH25095	LSW-254-254-952-WE	11~22	3	25,40	95,25	25,40	27,30	100,25	85,09	3000
WH25133	LSW-254-381-1333-WE	15~30	1	25,40	133,35	38,10		138,35	30,48	2000
WH25152	LSW-254-381-1524-WE	18~36	2	25,40	152,40	38,10	27,94	157,40	55,88	1000
WH25188	LSW-254-381-1889-WE	24~48	3	25,40	188,90	38,10	27,90	193,90	87,30	3000
WH38025	LSW-381-095-254-WE	3~5	1	38,10	25,40	9,53		30,40	43,18	5000
WH38038	LSW-381-127-381-WE	4~8	1	38,10	38,10	12,70		43,10	43,18	2500
WH44025	LSW-444-095-254-WE	3~5	1	44,45	25,40	9,53		30,40	49,53	5000
WH44038	LSW-444-127-381-WE	4~8	1	44,45	38,10	12,70		43,10	49,53	2500
WH48081	LSW-444-190-810-WE	10~19	1	48,30	81,00	19,05	50,80	86,00	54,00	2500
WH48151	LSW-483-381-1510-WE	18~35	2	48,30	151,00	38,10	50,80	156,00	105,10	1500
WH50036	LSW-508-127-365-WE	4~7	2	50,80	36,50	12,70	50,80	41,50	107,60	5000
WH50057	LSW-508-191-572-WE	6~12	2	50,80	57,20	19,10	50,80	62,20	107,60	5000
WH50095	LSW-508-254-952-WE	11~22	1	50,80	95,25	25,40		100,25	55,88	1000
WH50152	LSW-508-381-1524-WE	18~36	1	50,80	152,40	38,10		157,40	55,88	2000
WH50177	LSW-508-381-1778-WE	22~44	1	50,80	177,80	38,10		182,80	55,88	1000
WH50188	LSW-508-381-1889-WE	24~48	2	50,80	188,90	38,10	53,30	193,90	110,10	2000
WH63057	LSW-635-190-571-WE	6~12	1	63,50	57,15	19,05		62,15	68,58	3000

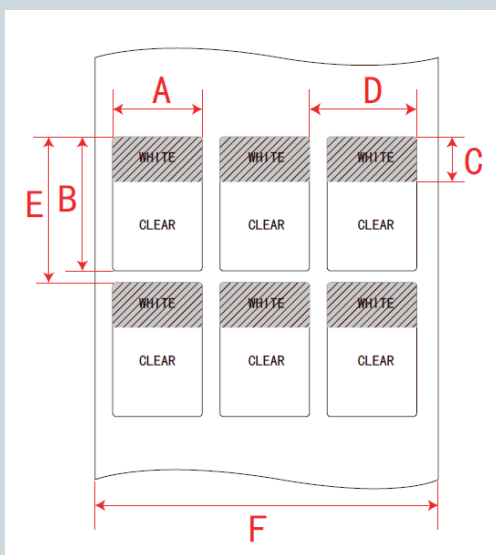

### Notes

This information and data is believed to be accurate and reliable. Although the information and recommendations set forth herein are presented in good faith and believed to be correct as of this date, Link Solutions makes no representations as to the completeness or accuracy thereof. We place at your disposal the technical information necessary for the correct use of our products. As conditions and methods of use are beyond our control, that the person receiving the same will make their own determination as to the suitability for their purpose.

We reserve the right to modify characteristics with the aim of improving the product and adapting it to the requirements of the market

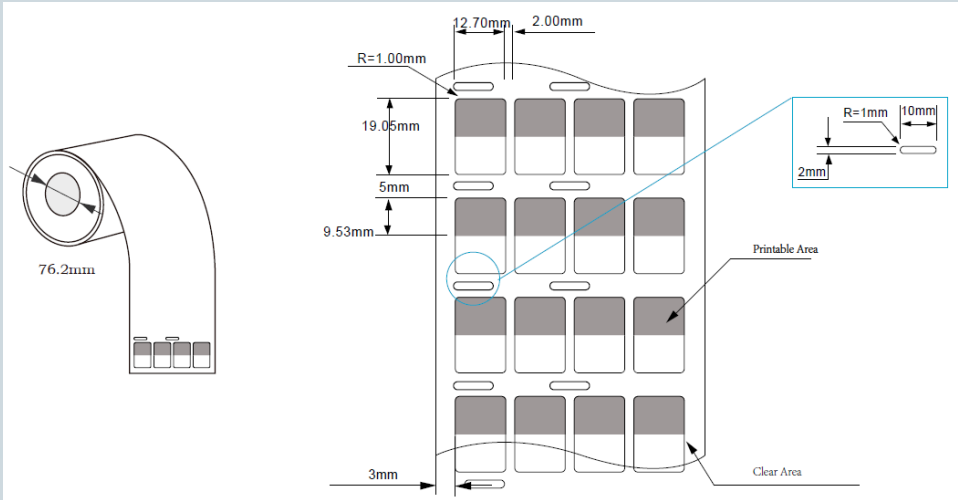

### Notes

This information and data is believed to be accurate and reliable. Although the information and recommendations set forth herein are presented in good faith and believed to be correct as of this date, Link Solutions makes no representations as to the completeness or accuracy thereof. We place at your disposal the technical information necessary for the correct use of our products. As conditions and methods of use are beyond our control, that the person receiving the same will make their own determination as to the suitability for their purpose.

We reserve the right to modify characteristics with the aim of improving the product and adapting it to the requirements of the market