
Technical datasheet

Issue: 03.11.2011

Product Description

Thermal Transfer Ribbon FTI-Y Black

Type:

Black Specialty-Resin thermal transfer ribbon

Ink:

Coating Weight: 1,8 g/m²
Melting Point: 82° C (179° F)
Type of Ink: Resin
Sensitivity of Ink: Middle

Substrate:

Material: Polyester
Melting Point: 250° C <
Thickness: 4.5µm
Density: 1,4 m²
Tensile Strength: 19 kg/mm²

Image Stability:

Heat Resistance: 180° C (one colour)
Scratch Resistance: excellent
Smudge Resistance: excellent
Solvent Resistance: excellent

Performance Characteristics:

- very good print quality on synthetics (preferred high gloss)
- outstanding smudge and scratch resistant
- resistant against solvents and chemicals
- medium printing energy
- Excellent edge definition

Storage conditions:

Storage temperature: +10°C - +35°C at relative humidity of 30 – 80%


Notes:

This information and data is believed to be accurate and reliable. Although the information and recommendations set forth herein are presented in good faith and believed to be correct as of this date, TEXTIT makes no representations as to the completeness or accuracy thereof. We place at your disposal the technical information necessary for the correct use of our products. As conditions and methods of use are beyond our control, that the person receiving the same will make their own determination as to the suitability for their purpose.

We reserve the right to modify characteristics with the aim of improving the product and adapting it to the requirements of the market.

Substance information

Hazardous Components	OSHA PEL	ACGIH TLV	Other Limits Recommended	%
Polyethylene Terephthalate film (CAS# 25038-59-9)	-	-	-	65-75%
Coating Layer Substances	-	-	-	24%
Carbon Black (CAS# 1333-86-4)	3.5mg/m ³	3.5mg/m ³	-	4-6%
Acrylic Resin (CAS# 9011-14-7)	-	-	-	6-9%
Chrolynated-polypropylene resin (CAS# 68442-33-1)	-	-	-	3-4%
Polyester (CAS# 73144-93-1)	-	-	-	2-3%
Vinyl Chloride – Vinyl Acetate co-polymers (CAS# 9003-22-9)	-	-	-	2-3%
Styrene-acrylonitrile-co-polymers (CAS# 9003-54-7)	-	-	-	1-3%
Zincstearyl-phosphate resin (CAS# 4615-31-0, 16700-97-3)	-	-	-	~2%
Urea Resin (CAS# 9011-05-6)	-	-	-	~2%
Others	-	-	-	3-8%

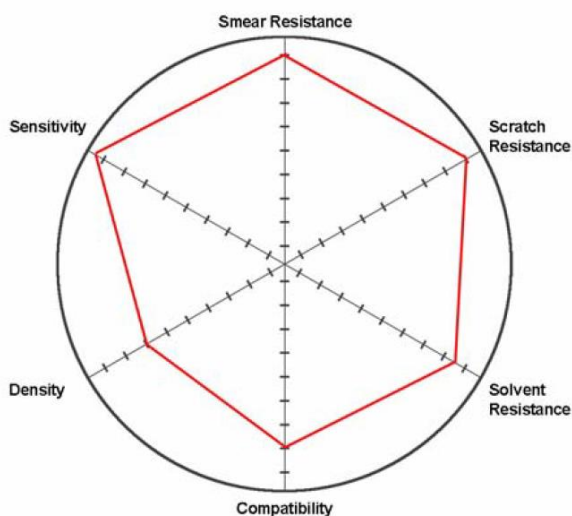

Notes:

This information and data is believed to be accurate and reliable. Although the information and recommendations set forth herein are presented in good faith and believed to be correct as of this date, TEXTIT makes no representations as to the completeness or accuracy thereof. We place at your disposal the technical information necessary for the correct use of our products. As conditions and methods of use are beyond our control, that the person receiving the same will make their own determination as to the suitability for their purpose. We reserve the right to modify characteristics with the aim of improving the product and adapting it to the requirements of the market.